

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**

NO
ENGLISH
Ref 5
G-44


OUTPUT CONTROL DEVICE FOR FUEL CELL POWER GENERATING SYSTEM

Patent number: JP4058463
 Publication date: 1992-02-25
 Inventor: KOMATSU TADASHI
 Applicant: FUJI ELECTRIC CO LTD
 Classification:
 - international: H01M8/04
 - european:
 Application number: JP19900166291 19900625
 Priority number(s):

Abstract of JP4058463

PURPOSE: To hold the proper utilization factor of reaction gas and stabilize the power generation of a fuel cell without impairing load responsiveness by collating the product of the current and voltage on a characteristic curve and a power command value to determine the target current value, and controlling the feed quantities of fuel gas and reaction air based on the target current value.

CONSTITUTION: The feed quantity of reaction gas to a fuel cell I is controlled by a target current estimation section 11 which receives the detected signals of detectors 14, 15 of the output current I_f and output voltage V_f of the fuel cell I and outputs the target current estimated value I_{fb} corresponding to a power command 20 and a reaction gas quantity calculation section 12 which receives the command value of the target current I_{fb} , calculates the reaction gas quantity corresponding to it, and outputs command signals 14F, 15A to an auxiliary machine controller. A response correcting circuit 13 delays the rising time and trailing time of the square-wave power command 20 to feed it to a controller 8, and the response speed of a power converter 7 is delayed to the response speed of a fuel reformer to control the output.

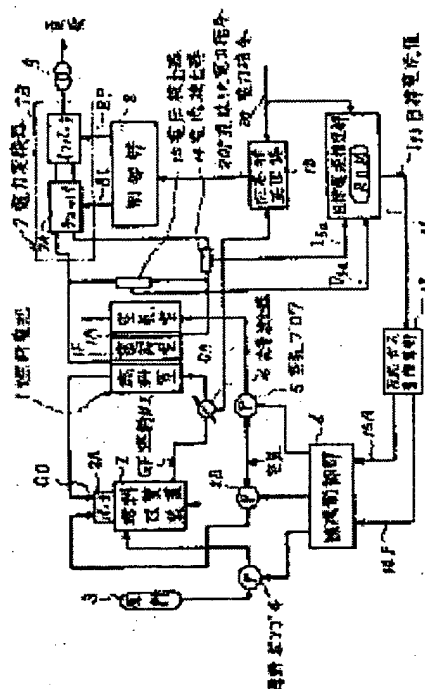

Data supplied from the esp@cenet database - Worldwide

OUTPUT CONTROL DEVICE FOR FUEL CELL POWER GENERATING SYSTEM

Legal status (INPADOC) of **JP4058463**

No legal data found.